Costronic since 1987	SH09Pe-mPe2 / SH09Pe-mPe2h User's Manual

Details of user manual download from http://www.costronic.com.tw/Edownload.htm

Installation and Operation:

1. Make sure the motherboard **Power Off** to install Costronic' card.

2. The Add-in card must without short circuit otherwise will cause damage.

3. Do not over-shake swapping/plugging Add-in card to prevent damage.

Switch and Jumper setup: **PH1:** Master board's pin header **PH1** connect to Target board's female header **PH1** (the Pin1 into Pin1).	xxx	Description:
 	xxx	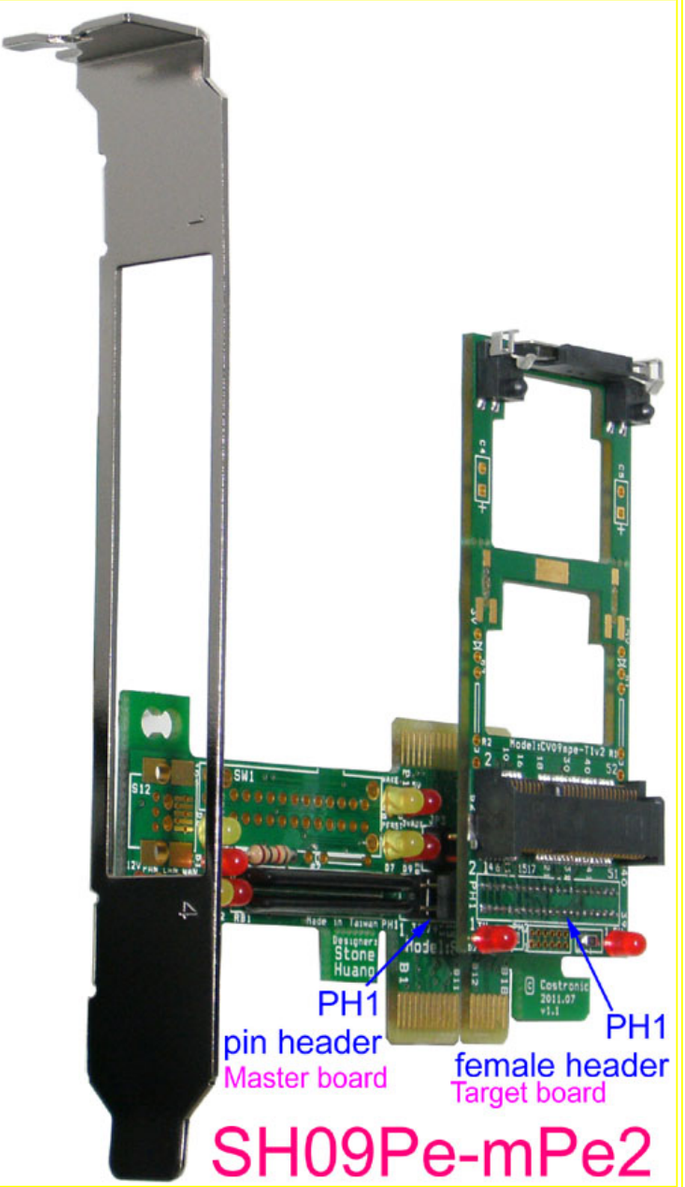

Description:

SH09Pe-mPe2 PCI Express to Mini PCI Express card / SH09Pe-mPe2h Half-Mini Card	
1. Insert Costronic' card into Desktop motherboard, for PCI Express Mini Card test, can avoid the inconvenience to use NoteBook. 2. The 52pin socket is 4.6mm height, and parts of the PCB with bare, easy to measure Mini Card Front/Back side signals. 3. LED inductor : 12V, 3.3V, 3.3Vaux, 1.5V, WAN, LAN, PAN, PERST, WAKE, WDIS. * If it can not test or unstable, replace the motherboard or Add-in card. * Can not guarantee 100% compatible, for various motherboard and adapter(Add-in card).	
Option: Add Switch for PCI Express power supply ON-OFF(Master board)	+NF
Option: Add Dual Mini PCI Express socket (Target board)	+mSK2